


# Windows XP x64 Edition: Print Driver Installation Guide




## 1. Opening the Printer and Faxes Window

Open the “Printer and Faxes” window by clicking “Start” then “Printer and Faxes”.

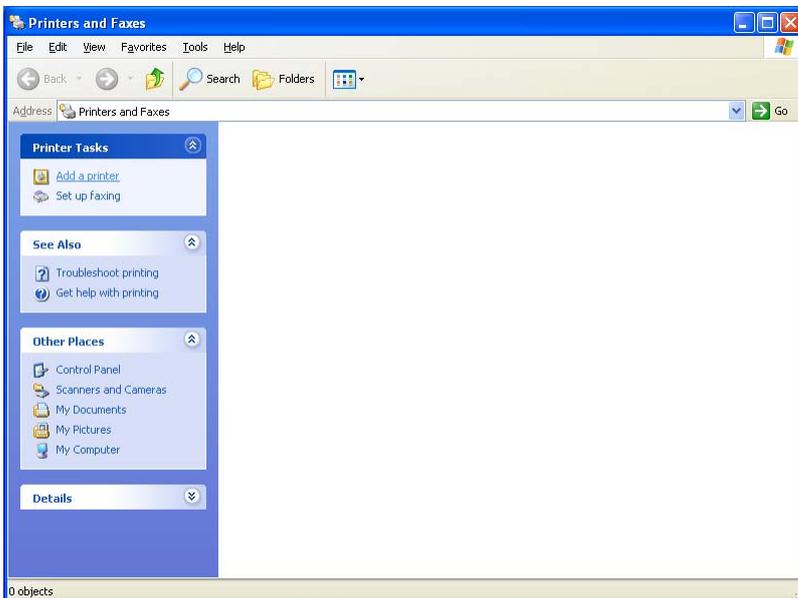


## 2. Adding a Printer

Select “Add a Printer” from the Printer Tasks.

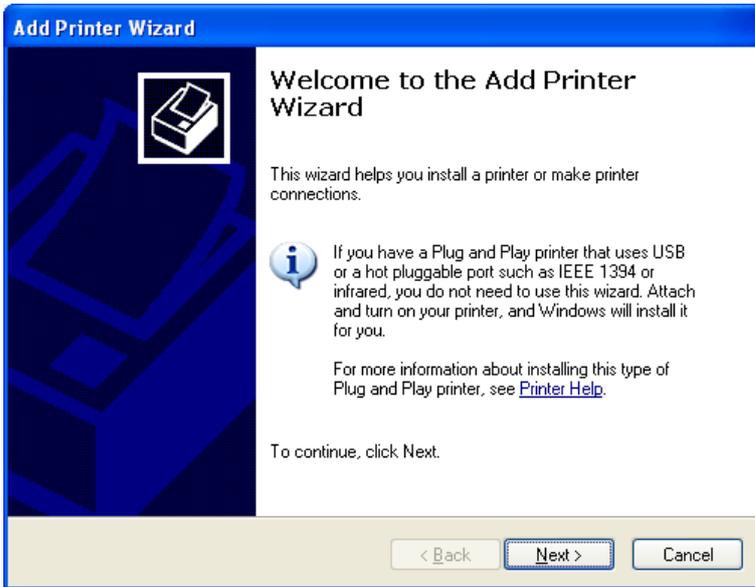

### 3. Welcome To the Add Printer Wizard

When the **Add Printer Wizard Welcome** screen is displayed, click **“Next”** to start the wizard

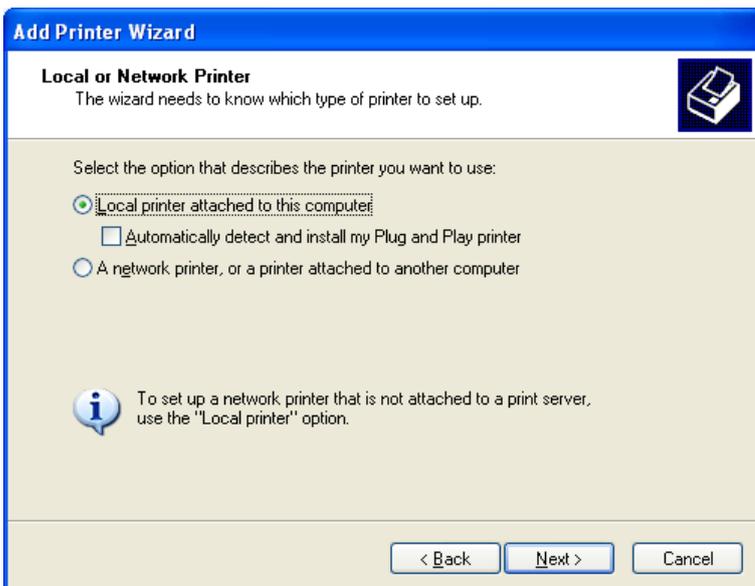


### 4. Local or Network Printer

Select **“Local printer attached to this computer”**

- Do not Check the **“Automatically detect and install my Plug and Play printer”** button.

When complete, press **“Next”** to continue


\*For USB setup, see the **“USB Print Driver Installation Guide”**.

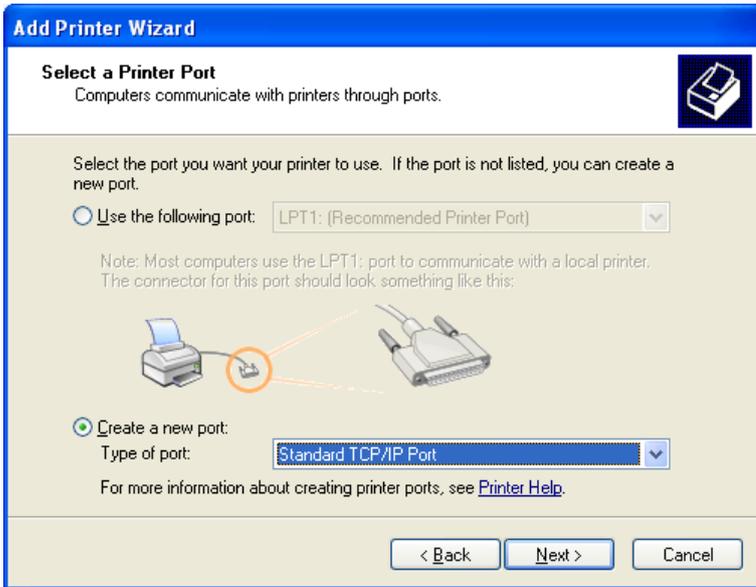

## 5. Select a Printer Port


Choose “**Create a new port**” and, select “**Standard TCP/IP Port**” from the Pull-down menu, then click “**Next**”

• For Parallel Port installation. Choose “**Use the following port**”, and select the LPT port you want to use, then click “**Next**” and **Skip to Step 10**

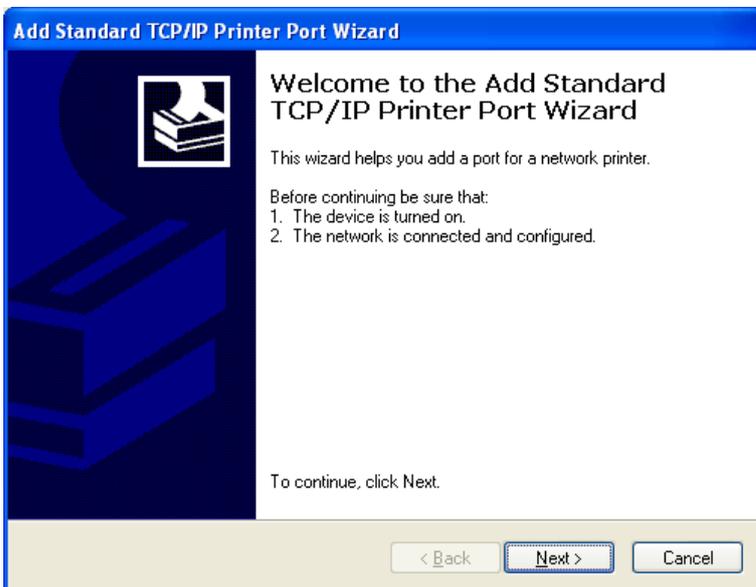

## 6. Add Standard TCP/IP Printer Port Wizard

Click “**Next**”.

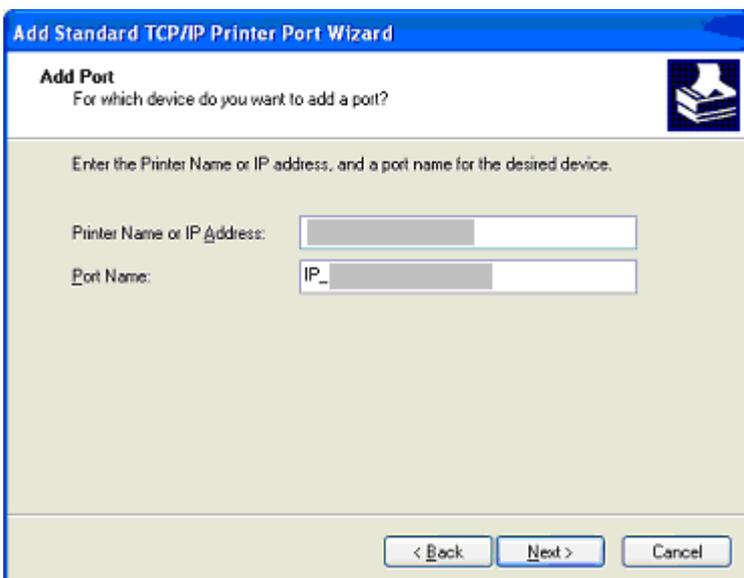


## 7. Add Port

Enter the **Printer Name** or **IP address**.

• After entering the Printer name or IP address, The “**Port Name**” will be set automatically.

When the **Printer name** or **IP address** is set, click “**Next**” to continue.

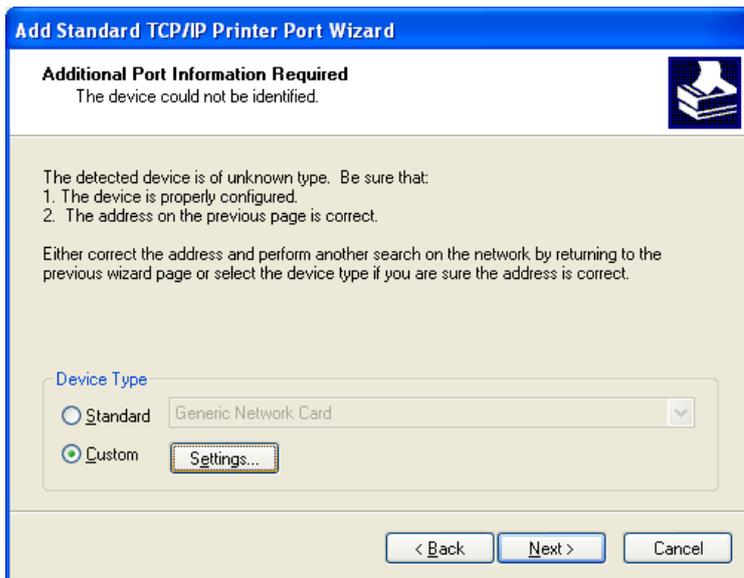

**Fig. Configure the Standard TCP/IP Port for LPR**


## 8. Additional Port Information


Select “Custom” and press the “Settings...” button as illustrated.

When the additional port settings are configured, click “Next”.

### 8a. Configure Std. Port Monitor


- Choose the “LPR” Protocol” and enter the “Queue Name”.
- Choose “LPR Byte Counting Enabled” then press “OK”.

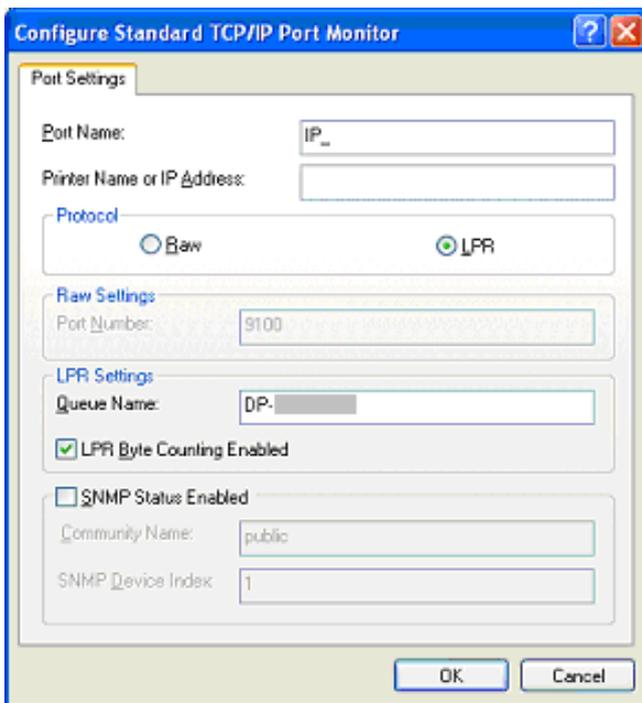

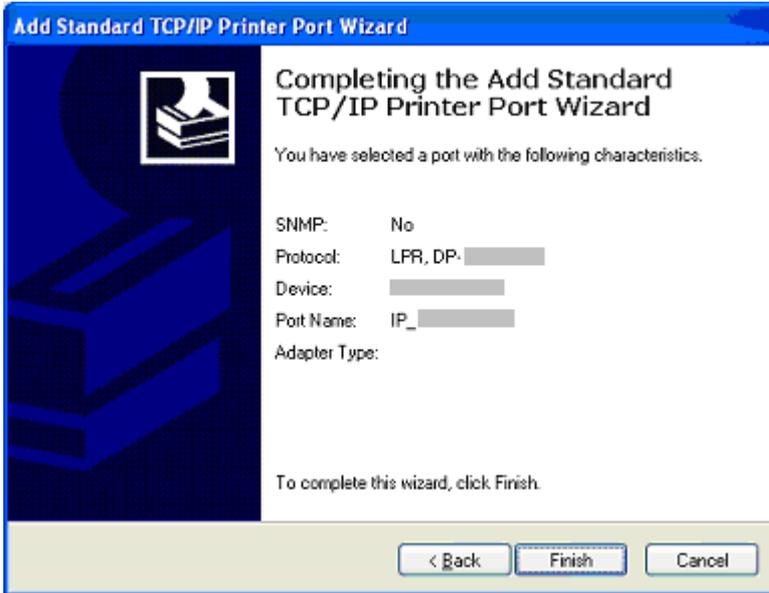


## 9. Completing the Add Standard TCP/IP Printer Port Wizard

The TCP/IP Printer Port settings are displayed, click **“Finish”** to complete the wizard and continue installing the Driver software.

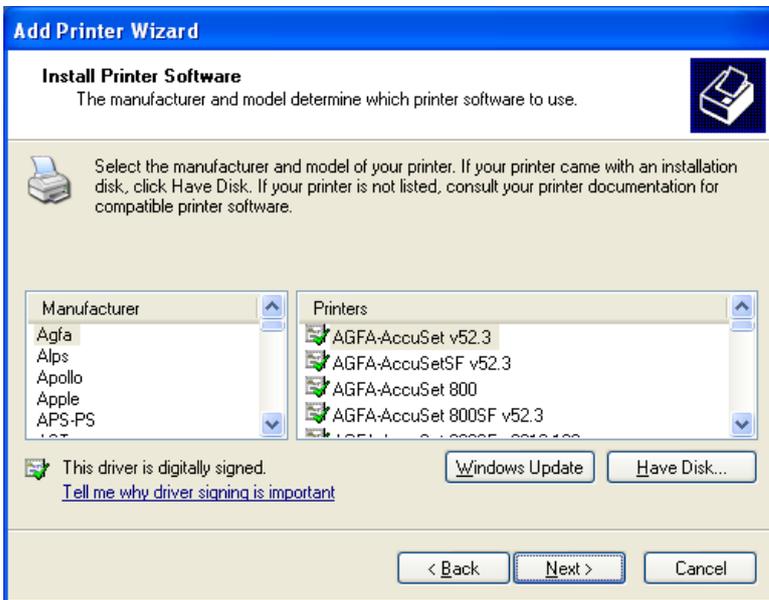


## 10. Install Printer Software

Click **“Have Disk”**

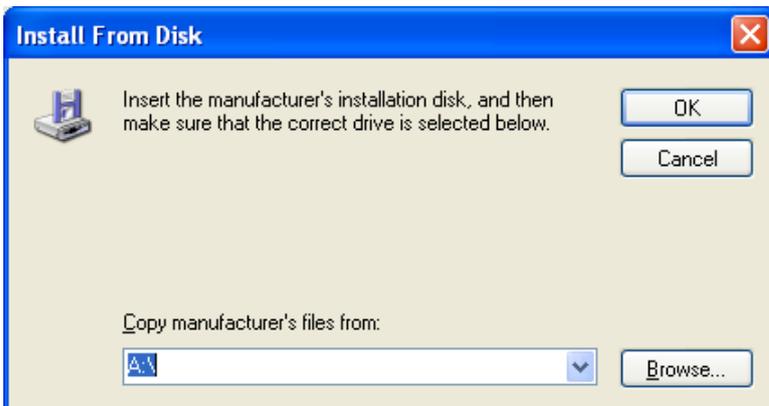


## 11. Install From Disk

Click **“Browse”**

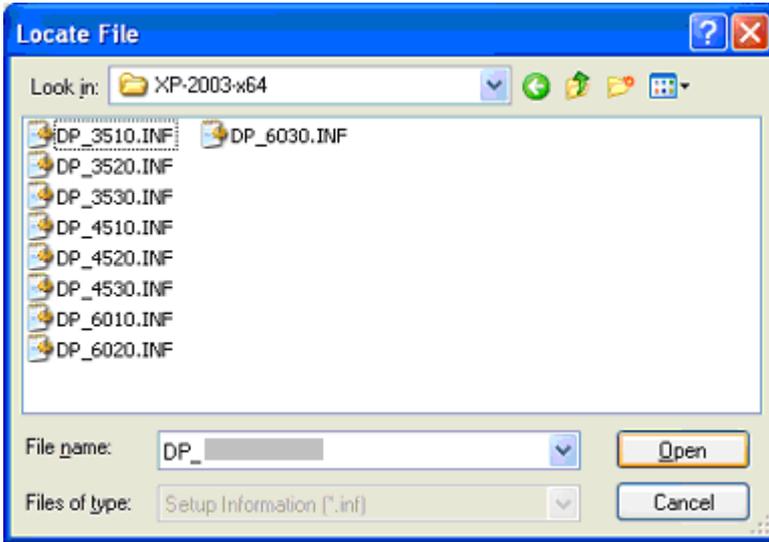


## 12. Locate File

Browse to the location where the driver files are located on the PC.

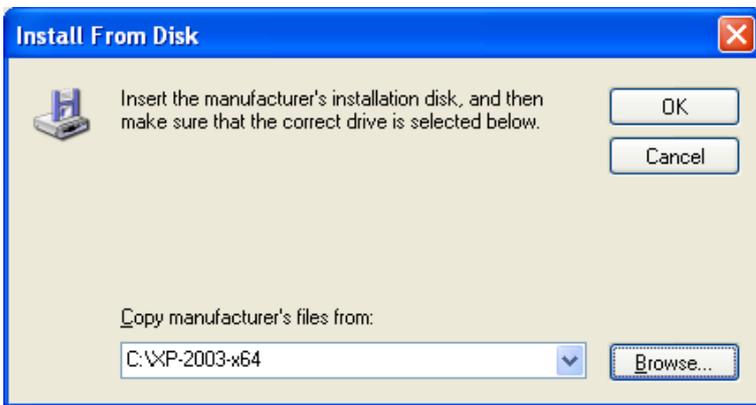


## 13. Install Selected Software

Click "OK".

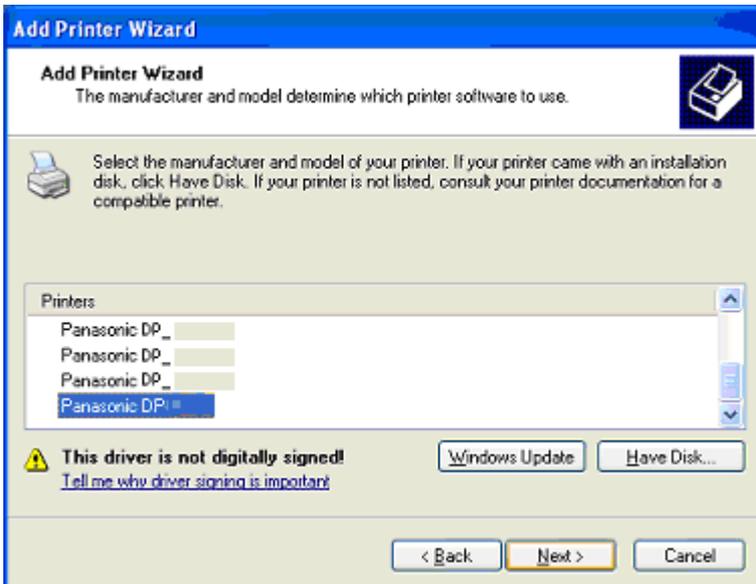


## 14. Selecting a Printer

Select the printer Model from the list, then click "Next".

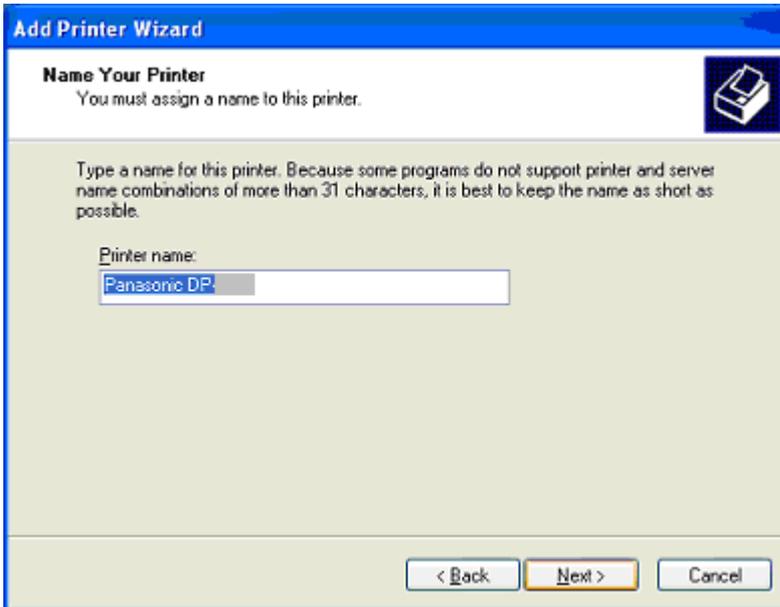

## 15. Name Your Printer


Enter a **Printer name** in the Textbox, then click **“Next”**

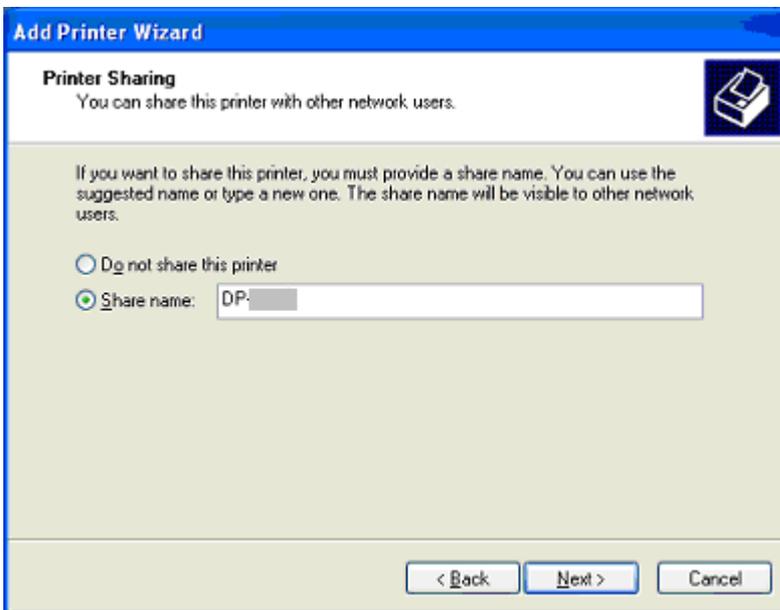

## 16. Printer Sharing (Optional)


Selecting whether or not to share the printer, and then click **“Next”**.

-When printer sharing is selected, the next screen will allow you to add a description for the device.

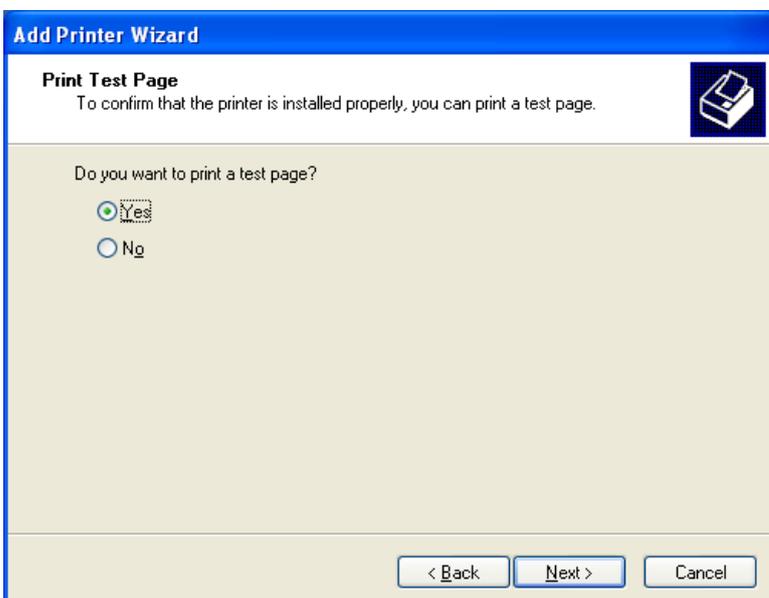

## 17. Print Test Page

Select **“Yes”** to generate a Windows Test Page, then click **“Next”**.

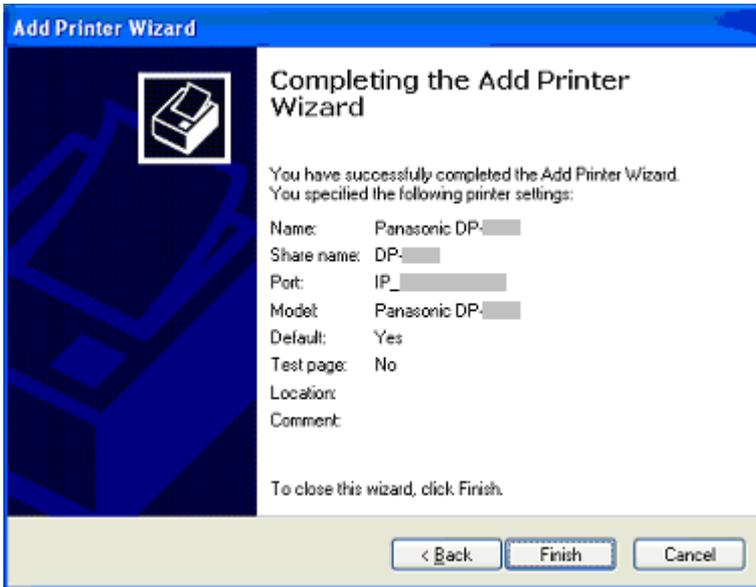

## 18. Completing the Add Printer Wizard

The Printer settings are displayed.


To begin the installation of the driver, click **“Finish”**.



## 19. Signed Driver Error Screen

When the warning message appears click **“Continue Anyway”**.

Note: Although the drivers are not digitally signed by Microsoft Corporation, we have verified proper operation within the Windows operating system environment.

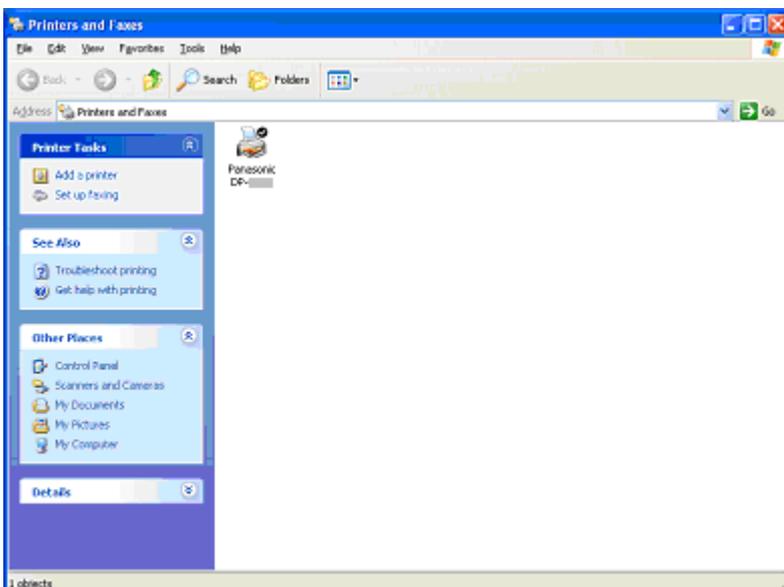

## 20. Installation completed

A new Printer Icon will appear in the **Printer and Faxes** window.