


Windows XP x64 Edition: Print Driver Installation Guide




1. Opening the Printer and Faxes Window

Open the “**Printer and Faxes**” window by clicking “**Start**” then “**Printer and Faxes**”.

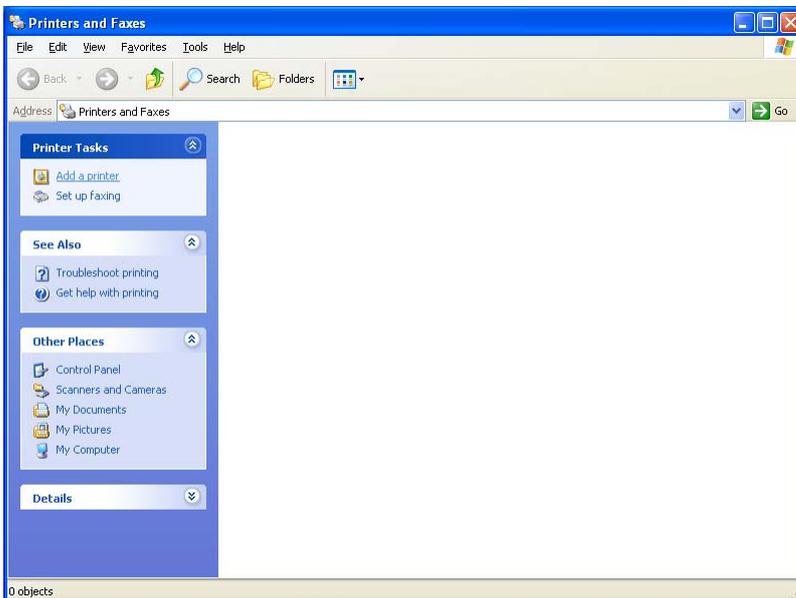

2. Adding a Printer

Select “**Add a Printer**” from the Printer Tasks.

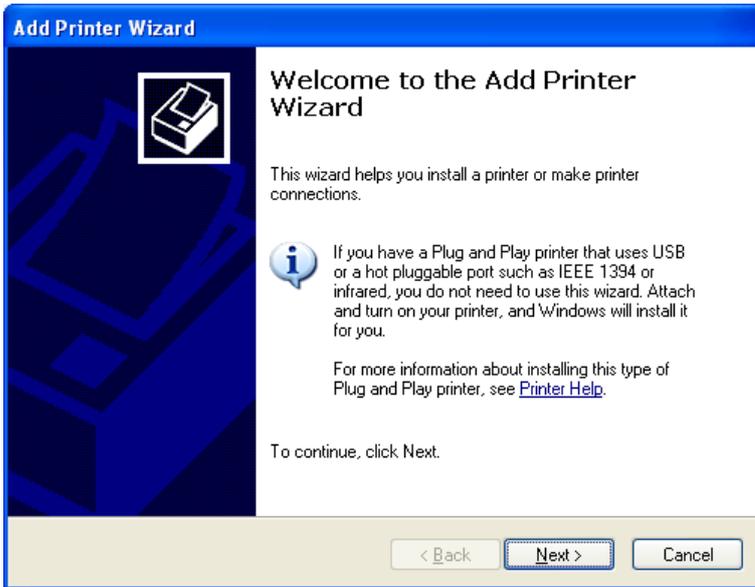

3. Welcome To the Add Printer Wizard

When the **Add Printer Wizard Welcome** screen is displayed, click **“Next”** to start the wizard




4. Local or Network Printer

Select **“Local printer attached to this computer”**

- Do not Check the **“Automatically detect and install my Plug and Play printer”** button.

When complete, press **“Next”** to continue


*For USB setup, see the **“USB Print Driver Installation Guide”**.

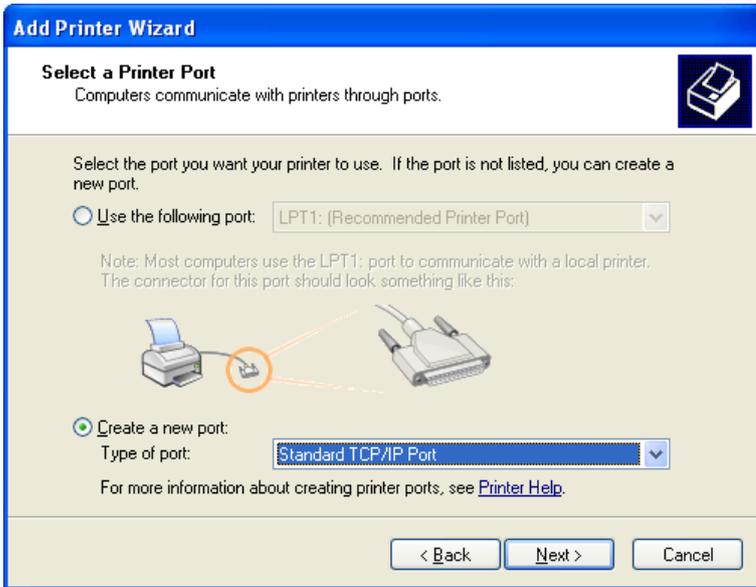

5. Select a Printer Port


Choose “**Create a new port**” and, select “**Standard TCP/IP Port**” from the Pull-down menu, then click “**Next**”

• For Parallel Port installation. Choose “**Use the following port**”, and select the LPT port you want to use, then click “**Next**” and **Skip to Step 10**

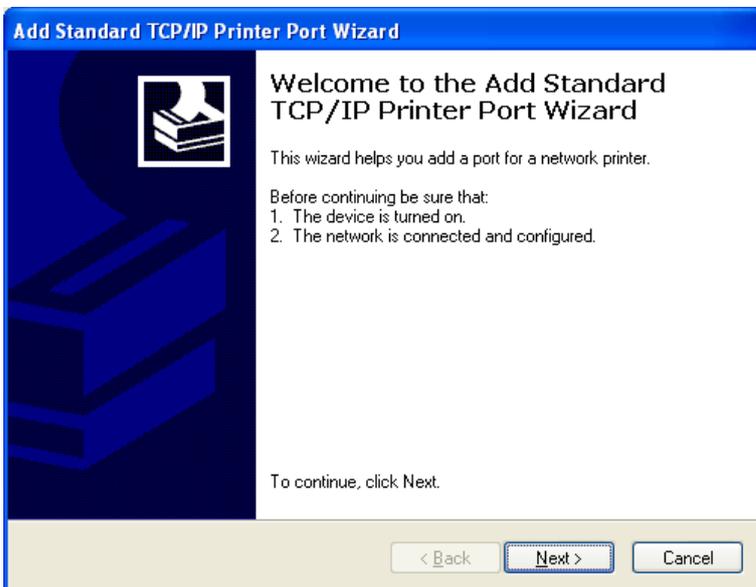

6. Add Standard TCP/IP Printer Port Wizard

Click “**Next**”.

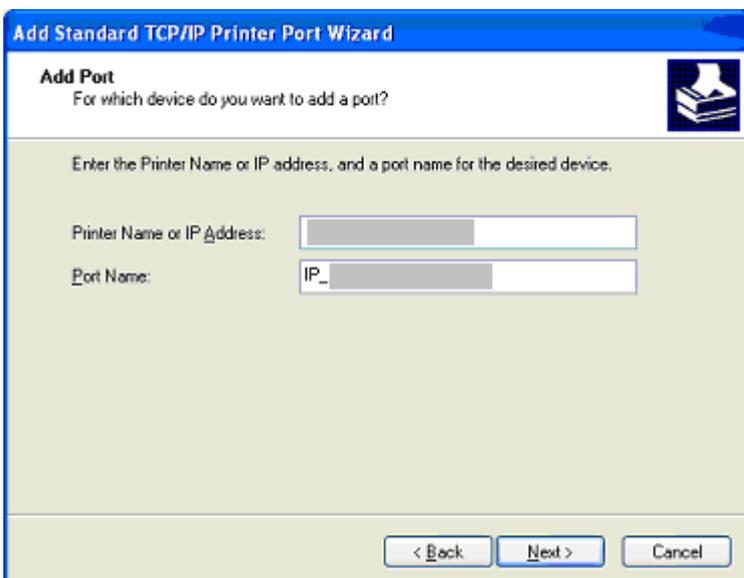


7. Add Port

Enter the **Printer Name** or **IP address**.


• After entering the Printer name or IP address, The “**Port Name**” will be set automatically.

When the **Printer name** or **IP address** is set, click “**Next**” to continue.

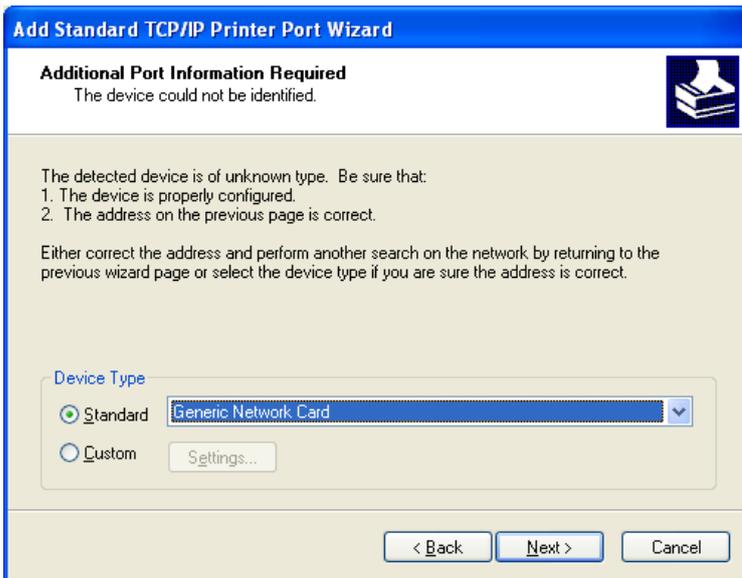


8. Additional Port Information

• Select the “**Standard**” check box and make sure the “**Generic Network Card**” is selected from the drop down, then click “**Next**”.

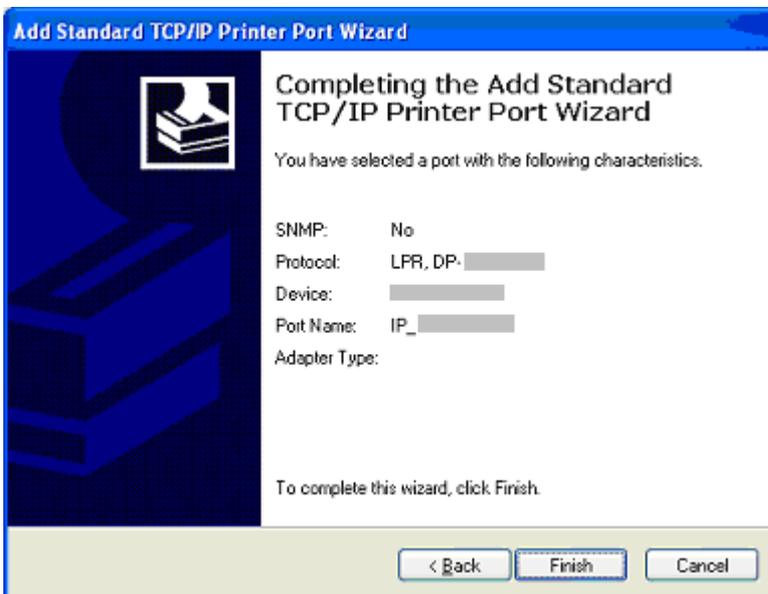


9. Completing the Add Standard TCP/IP Printer Port Wizard

The TCP/IP Printer Port settings are displayed, click “**Finish**” to complete the wizard and continue installing the Driver software.

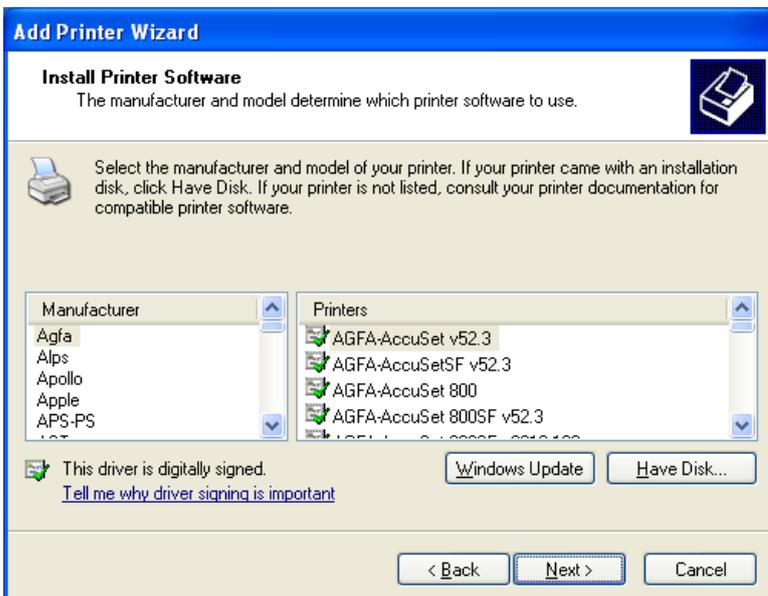


10. Install Printer Software

Click “**Have Disk**”

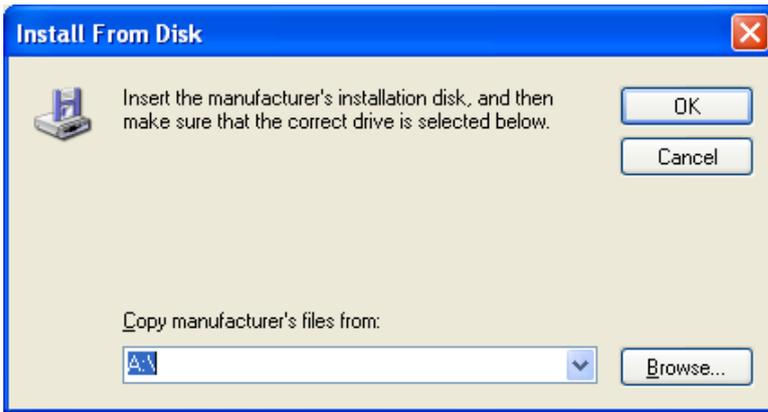


11. Install From Disk

Click “Browse”

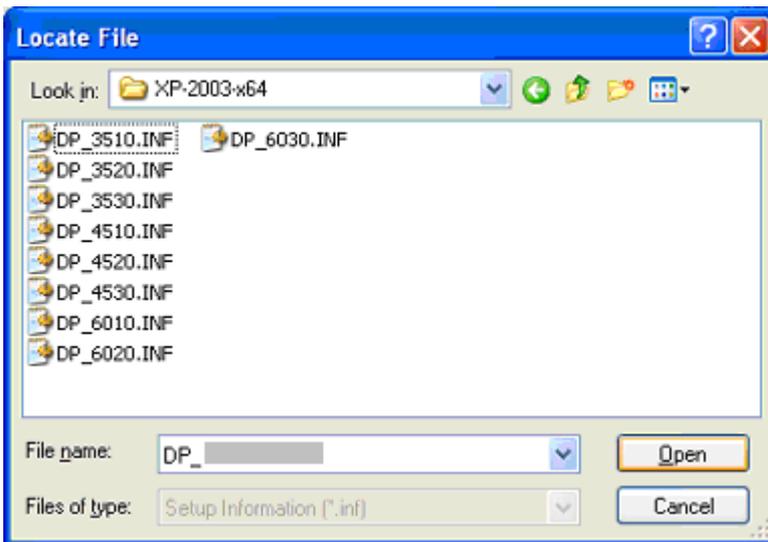


12. Locate File

Browse to the location where the driver files are located on the PC.

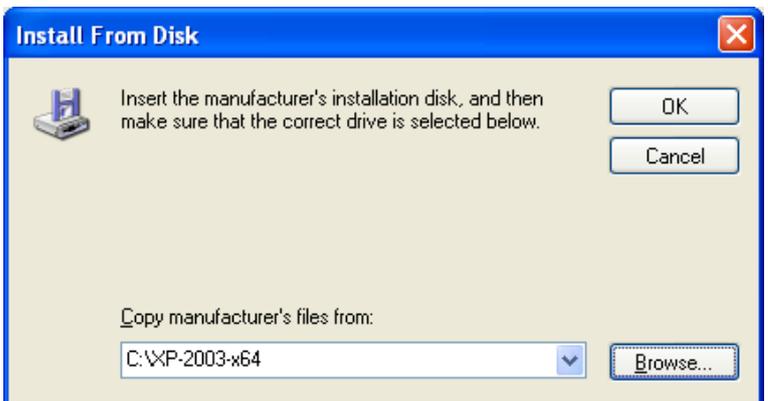


13. Install Selected Software

Click “OK”.

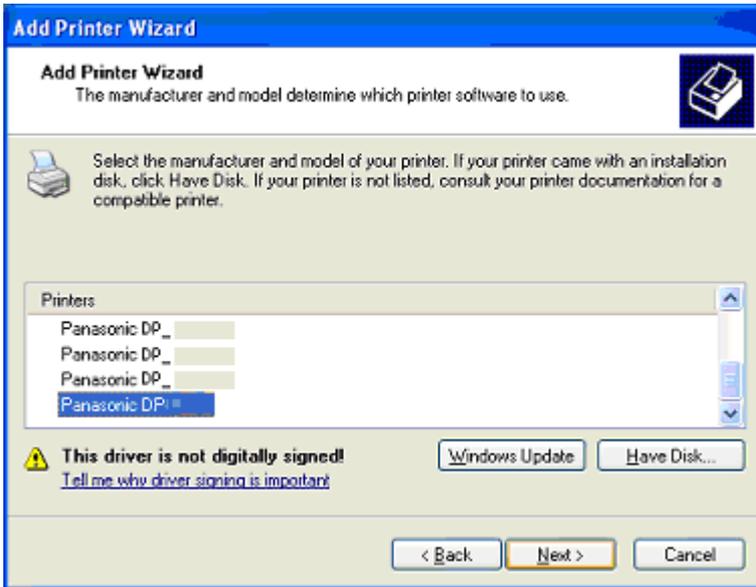


14. Selecting a Printer

Select the printer Model from the list, then click “Next”.

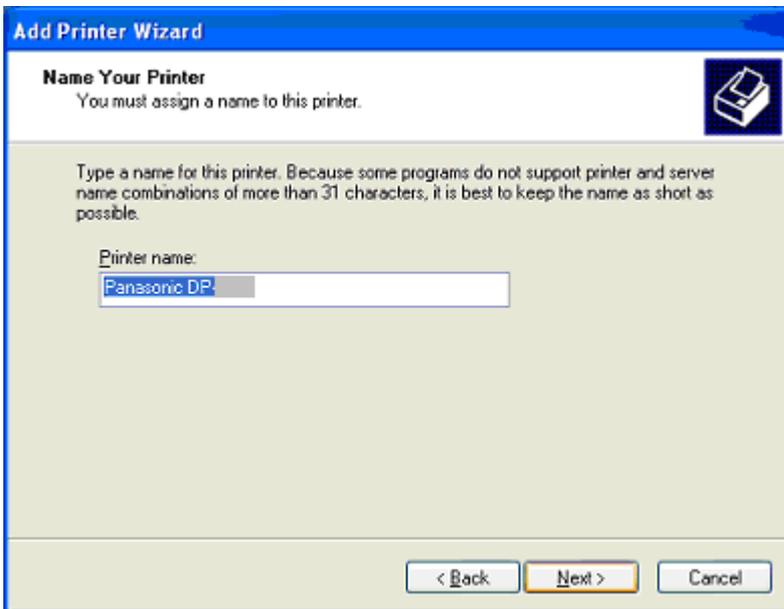

15. Name Your Printer


Enter a Printer name in the Textbox, then click “Next”

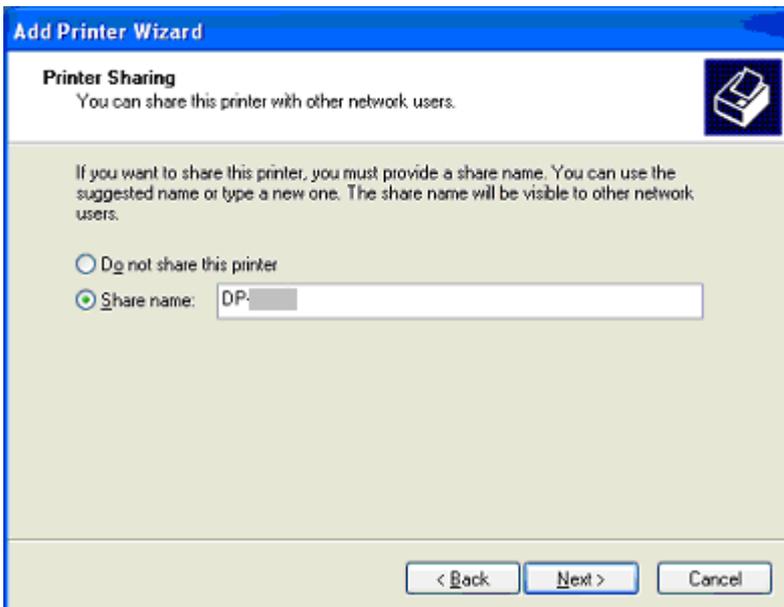

16. Printer Sharing (Optional)


Selecting whether or not to share the printer, and then click “Next”.

-When printer sharing is selected, the next screen will allow you to add a description for the device.

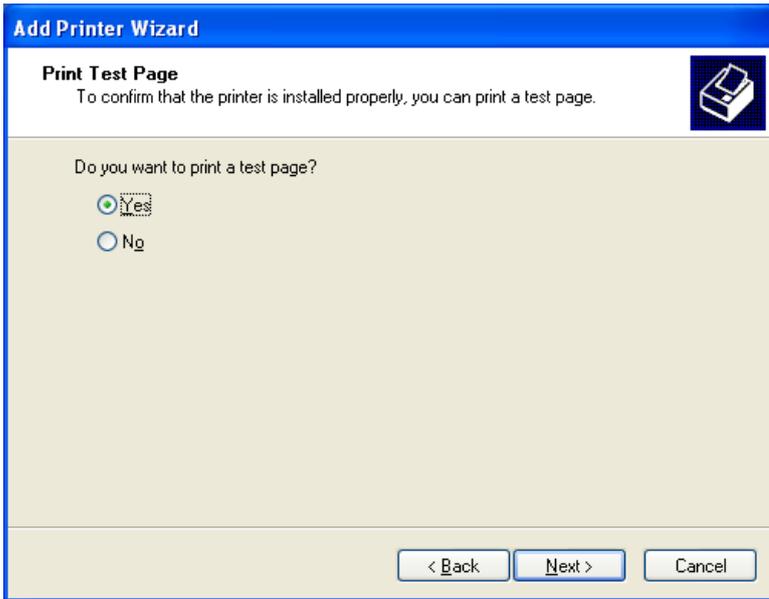

17. Print Test Page

Select “Yes” to generate a Windows Test Page, then click “Next”.

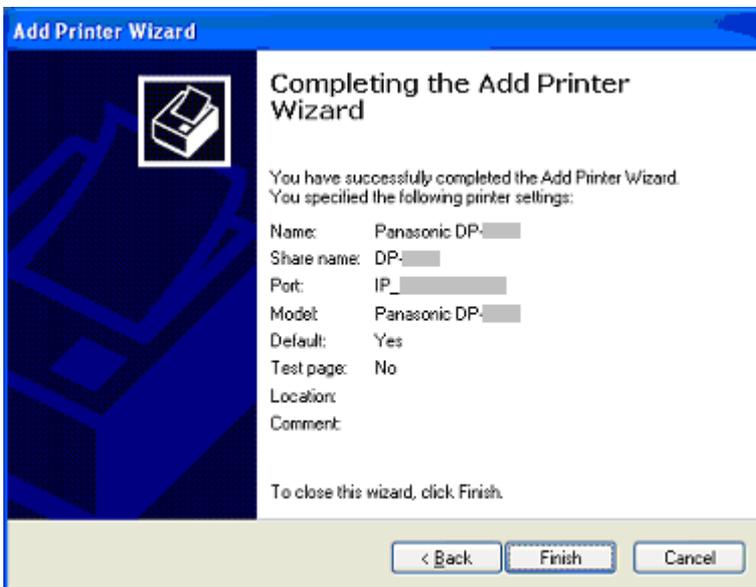

18. Completing the Add Printer Wizard

The Printer settings are displayed.


To begin the installation of the driver, click “Finish”.



19. Signed Driver Error Screen

When the warning message appears click “Continue Anyway”.

Note: Although the drivers are not digitally signed by Microsoft Corporation, we have verified proper operation within the Windows operating system environment.

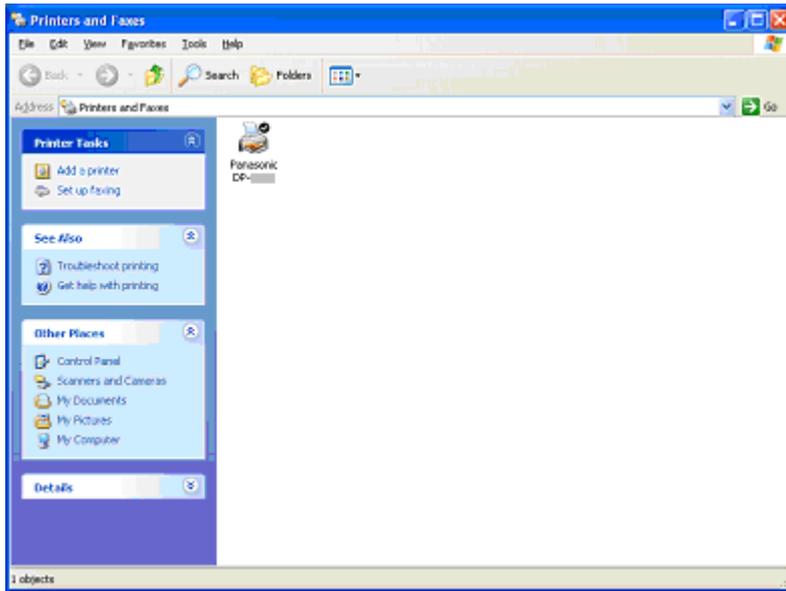

20. Installation complete

A new Printer Icon will appear in the **Printer and Faxes** window.